


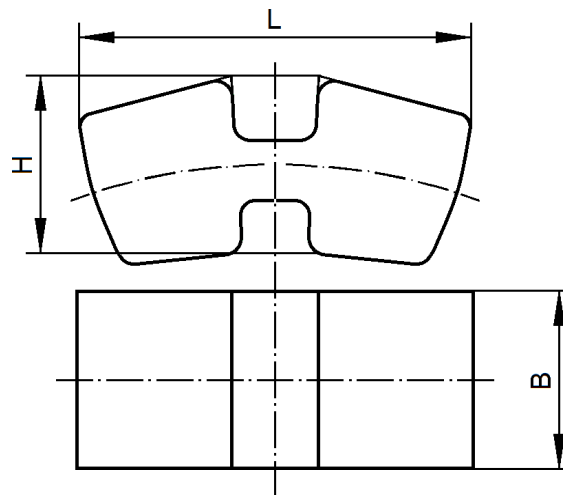

Verschleißteile – Puffer ELKU-N

nach KWN 22013

Puffer für Elast. Klauenkupplungen, aus Perbunan 80 Shore A


Nenngröße

Kupplung	Puffer	Geometrie			Gewicht m [kg]	Anzahl pro Satz
		L [mm]	B [mm]	H [mm]		
2,5	NG 2,5	23	9	9	0,002	4
4	NG 4	23	9	9	0,002	5
6,3	NG 6,3	20	10	10	0,002	6
10	NG 10	25	12	12	0,004	6
16	NG 16	29	15	13	0,006	6
25	NG 25	33	18	15	0,008	6
40	NG 40	37	20	17	0,011	6
63	NG 63	37	22	19	0,014	7
100	NG 100	35	24	19,5	0,016	8
160	NG 160	38	27	23	0,024	8
200	NG 200	43	31	26	0,031	8
250	NG 250	47	35	29	0,043	8
400	NG 400	53	40	32,5	0,061	8
500	NG 500	53	42,5	35,5	0,068	9
630	NG 630	57	45	38	0,085	9
1000	NG 1000	61,5	48	40	0,095	10
1250	NG 1250	67	52	42	0,130	10
1600	NG 1600	71	55	45	0,157	10
2500	NG 2500	80	60	50	0,215	10
3150	NG 3150	80	67,5	57	0,310	10
4000	NG 4000	89	74	62	0,390	10
5000	NG 5000	100	80	68	0,540	10
6300	NG 6300	106	88,5	74	0,720	10